

TL-3015 |

CEILING RECESSED

Product description

High power ceiling downlight LED and defined light halo. With die-cast zinc coating and aluminium die-cast heat sink. With aluminium reflector technology to ensure the best distribution and available for reflector and ring color options.

Additional information

Available with LUTRON Ecosystems (Architectural Dimming).

Physical

Ring: *White / black*
 Reflector: *White / golden / black / silver*
 Embedded cut: *Ø5.90"*
 Construction material: *Zinc die casting*
 Dimension: *Ø6.18x4.13"*


Mounting: *Recessed*
 IP: *43*
 IK:
 Weight:

Technical data




Dimming: *TRIAC a*
90 - 130 V~ / DALI
/0 - 10 V~ / LUTRON
Ecosystems
 Driver: *Included (remote)*
 Life Time LED: *30 000 h*
 Lamp: *Included*
 Insulation class: *Class II*
 LED: *Citizen 1206*

Harmonics:
 Amperage: *0.2 - 0.07 A*
 Power Factor:
 Input Frequency: *50/60 Hz*
 W Source: *20 W*
 Ambient temperature range:
 Voltage: *100 - 277 V~*
 Beam angle: *45°*

Real flux: *700 K (1 800 lm) /*
3 000 K (1 860 lm) / 4 000 K
(2 000 lm)
 Nominal flux:
 CRI: *≥90*
 Light temperature:
2 700 K / 3 000 K / 4 000 K
 UGR:



Beam angle

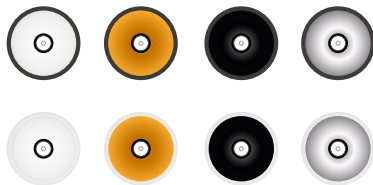

• Colour Rings and Reflectors

CERTIFICATIONS



Product configuration

* USE THIS FIELD ONLY IF REQUIRED

TL-3020.

	RING	REFLECTOR	LIGHT TEMPERATURE			* DIMMABLE	
B N	WHITE	B WHITE	27	2 700 K	D	DIMTRIAC	
	BLACK	D GOLDEN	30	3 000 K	DALI	DALI	
		N BLACK	40	4 000 K	0-10V	0 - 10 V~	
		P SILVER			PEQ0E	100% - 0.1%	
					PEQ1E	100% - 1%	
					LDE5	100% - 5%	
					LDE1	100% - 1%	
					LTEA2W	100% - 1%	

Architectural DIMMABLE LUTRON Ecosystems

Codes Lutron Family DIMMABLE range

			Description
PEQ0E	Hi-lume Premier	100% - 0.1%	Hi-lume Premier 0.1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
PEQ01E	Hi-lume Premier	100% - 1%	Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
LDE5	5-Series	100% - 5%	5-Series EcoSystem LED driver
LDE1	Hi-lume	100% - 1%	Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
LTEA2W	Hi-lume	100% - 1%	Hi-lume 1% 2-wire LED driver (120 V forward phase only)

