



PLEASE READ CAREFULLY BEFORE USING THE PRODUCT
SAVE THESE INSTRUCTIONS

INSTALLATION MANUAL

RASTER ADJUSTABLE INSIDE / RECESSED LUMINAIRE

MODELS.


TL-2810.DIRB / TL-2810.DIRN APPLY IN ANY INSIDE COLOR, 2 200 K, 2 700 K, 3 000 K, 4 000 K, 5 000 K OR RGBW
LIGHT TEMPERATURE, 10°, 15°, 30° OR 45° BEAM ANGLE, CLEAR, DIFFUSED, VERTICAL OR PRISMATIC OPTICAL
LEN AND DIMMABLE OR NOT DIMMABLE

CAUTION.

- Read all instructions.
- Do not install this track in damp or wet locations.
- Do not install any part of a track system less than 5 feet above the floor.
- Do not install any luminaire assembly closer than 6 inches from any curtain, or similar combustible material.
- Disconnect electrical power before handling or changing track lighting.

INSTALLATION INSTRUCTIONS.

- Verify that the available voltage is adequate for the lighting operation.
- Disconnect electrical power to circuit before installation.
- Identify the area where the luminaire will be placed and drill according to the internal measurement of the luminaire.
- Connect the wiring using the driver included with the lighting: Primary (127 V ~) Connect the cables corresponding to positive ("L") and neutral ("N").
- Once the driver is inserted, pull the retaining clips on the sides of the fixture.
- Grasp the fixture firmly and insert it through the hole, remember to press down on the holding clips.
- Check that the clamps are secure and adjust the lighting if necessary.
- Adjust the tilt of the fixture to the desired angle.
- Restore the electrical current and check the correct operation of the lighting.

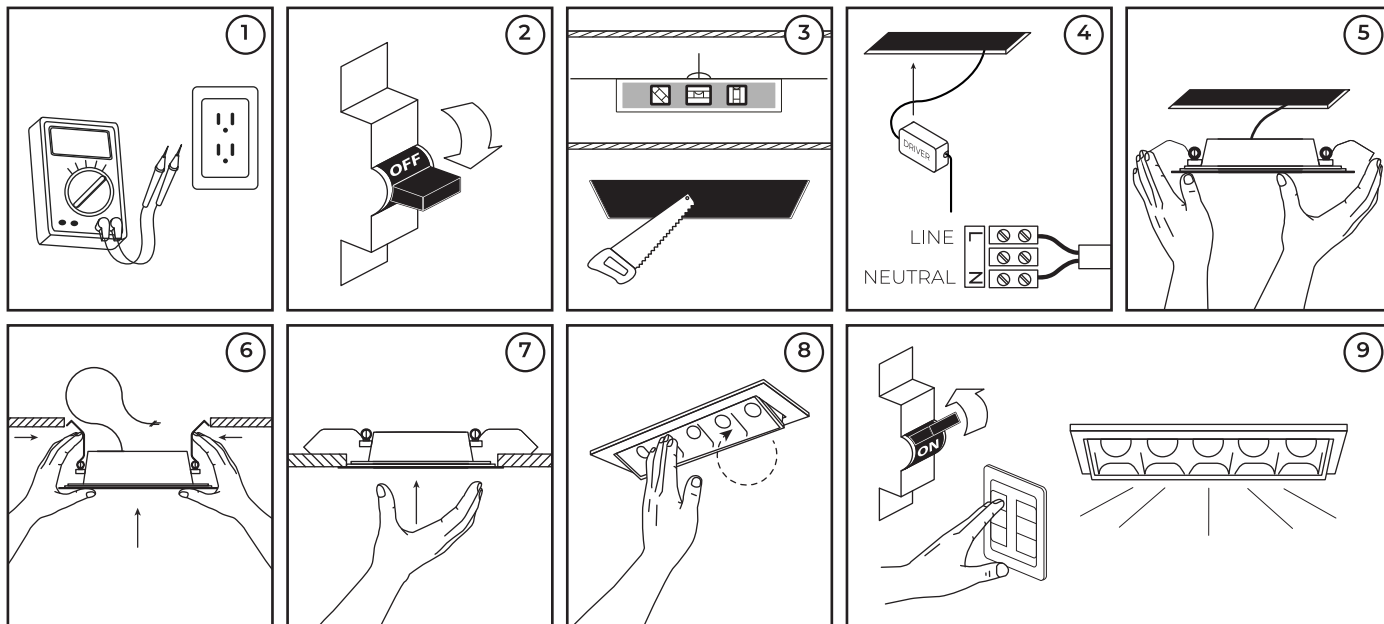

ELECTRIC SPECIFICATIONS.

LAMP: SMD LED 3030 OSRAM

POWER: 10 W

FREQUENCY: 50/60 Hz

VOLTAGE NOT DIMMABLE: 100 - 277 V~ / 0.10 - 0.03 A

VOLTAGE DIMMABLE TRIAC: 90 - 130 V~ / 0.11 - 0.07 A

VOLTAGE RGBW: 100 - 240 V~ / 0.10 - 0.04 A

ENERGY CONSUMPTION: 0.01 kWh

HOURS LIFE: 35 000 h

CRI: ≥90

DRIVER INCLUDED (REMOTE)

OPERATING TEMPERATURE -20 °C TO +45 °C

ILLUX DE MÉXICO S.A. DE C.V.
MADE IN MEXICO

SAVE THESE INSTRUCTIONS

DATE CODE:



Intertek
5019329

Conforms to
UL Std 1598
UL Std 8750

