



THE RASTER®



* Opaline and wallwasher variables

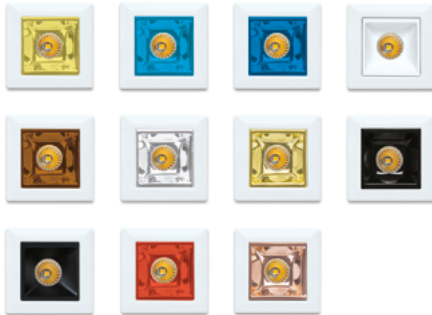

TL-2810.TRK |

RAIL TRACK SYSTEM

Product description

Rail track system luminaire 10 W. With mini reflectors that reduce glare and optimize visual comfort. LED technology with high light efficiency and high CRI.

Additional information

10° beam angle only available with Clear Lens.

Physical

Outside colors: White / black

Inside colors: Yellow / sky blue / royal blue / white / light brown / chrome / golden / black / matt black / red / pink

Embedded cut: Not applies

Manufactured: Die-cast aluminum

Dimension: 1.33x5.51x3.14"

Mounting: Rail track

IP: 23

IK:

Weight:

Technical data

Dimming:

TRIAC (90 - 130 V~)

Driver: Included (remote)

Life Time LED: 35 000 h

Lamp: Included

Insulation class: Class II

LED: SMD OSRAM 3030

Harmonics: <15%

Amperage: 0.1 - 0.03 A

Power Factor: 0.9

Input Frequency: 50/60 Hz

Power: 10 W

Ambient temperature range:

-20 °C a +45 °C

Voltage: 100 - 300 V~

Beam angles:

10° / 15° / 30° / 45°

Real flux: 2 200 K (650 lm) /

2 700 K (700 lm) / 3 000 K

(725 lm) / 4 000 K (750 lm) /

5 000 K (800 lm)

Nominal flux:

CRI: ≥90


Light temperature: 2 200 K /

2 700 K / 3 000 K / 4 000 K

/ 5 000 K

UGR: ≤16

Optical properties and beam angle

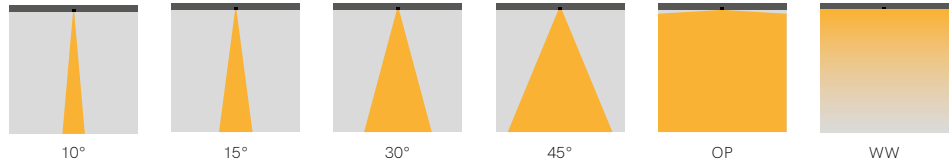

Product configuration

TL-2810.TRK

VARIANT	OUTSIDE COLORS	INSIDE COLORS	LIGHT TEMPERATURE	BEAM ANGLES	OPTICAL LENS	DIMMABLE
OP OPALINE	B WHITE	A YELLOW	22 2 200 K	10 10°	LC CLEAR	D DIMTRIAC
WW WALLWASHER	N BLACK	AC SKY BLUE	27 2 700 K	15 15°	LD DIFFUSE	
		AR ROYAL BLUE	30 3 000 K	30 30°	LV VERTICAL (LONGITUDINAL)	
		B WHITE	40 4 000 K	45 45°	LP PRISMATIC	
		C LIGHT BROWN	50 5 000 K			
		CR CHROME				
		D GOLDEN				
		N BLACK				
		NM BLACK MATT				
		R RED				
		RS PINK				

* Place write only if you want these combinations.

* Not APPLY WITH OP y WW

CERTIFICATIONS



* 10° beam angle only available with clear lens.

