





* Opaline and wallwasher variables

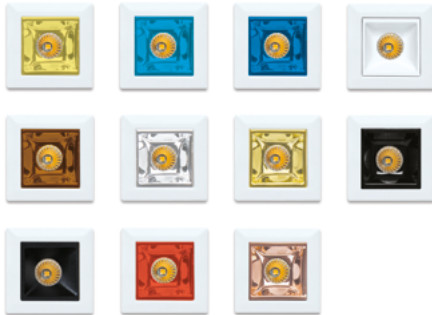

Product description

Rail track system luminaire 20 W. With mini reflectors that reduce glare and optimize visual comfort. LED technology with high light efficiency and high CRI.

Additional information

10° beam angle only available with Clear Lens.

Physical

Outside colors: White / black

Inside colors: Yellow / sky blue / royal blue / white / light brown / chrome / golden / black / matt black / red / pink

Embedded cut: Not applies

Manufactured: Die-cast aluminum

Dimension: 10.62x1.23x3.14"

Mounting: Rail track

IP: 23

IK:

Weight:

Technical data

Dimming:

TRIAC (90 - 130 V~)

Driver: Included (remote)

Life Time LED: 35 000 h

Lamp: Included

Insulation class: Class II

LED: SMD OSRAM 3030

Harmonics: <15%

Amperage: 0.2 - 0.07 A

Power Factor: 0.9

Input Frequency: 50/60 Hz

Power: 20 W

Ambient temperature range:

-20 °C a +45 °C

Voltage: 100 - 300 V~

Beam angles:

10° / 15° / 30° / 45°

Real flux:

2 200 K (1 300 lm) /

2 700 K (1 400 lm) / 3 000 K

(1 450 lm) / 4 000 K (1 500 lm)

/ 5 000 K (1 600 lm)

Nominal flux:

CRI: ≥90


Light temperature: 2 200 K /

2 700 K / 3 000 K / 4 000 K

/ 5 000 K

UGR: ≤16

Optical properties and beam angle

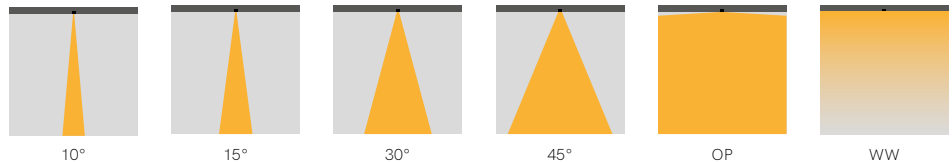

Product configuration

TL-2820.TRK

VARIANT	OUTSIDE COLORS	INSIDE COLORS	LIGHT TEMPERATURE	BEAM ANGLES	OPTICAL LENS	DIMMABLE
OP OPALINE WW WALLWASHER	B N WHITE BLACK	A YELLOW AC SKY BLUE AR ROYAL BLUE B WHITE C LIGHT BROWN CR CHROME D GOLDEN N BLACK NM BLACK MATT R RED RS PINK	22 2 200 K 27 2 700 K 30 3 000 K 40 4 000 K 50 5 000 K	10 10° 15 15° 30 30° 45 45°	LC CLEAR LD DIFFUSE LV VERTICAL (LONGITUDINAL) LP PRISMATIC	D DIMTRIAC

* Place write only if you want these combinations.

* Not APPLY WITH OP y WW

CERTIFICATIONS



* 10° beam angle only available with clear lens.

