

## Product description

Rail track system luminaire 30 W. With mini reflectors that reduce glare and optimize visual comfort. LED technology with high light efficiency and high CRI.

## Additional information

10° beam angle only available with Clear Lens.

## Physical

Outside colors: *White / black*  
Inside colors: *Yellow / sky blue / royal blue / white / light brown / chrome / golden / black / matt black / red / pink*  
Embedded cut: *Not applies*  
Manufactured: *Die-cast aluminum*

Dimension: 15.74×1.33×3.14"  
Mounting: *Rail track system*  
IP: 23  
IK:  
Weight:


## Technical data

Dimming: *TRIAC (90 - 130 V~)*  
Driver: *Included (remote)*  
Life Time LED: *35 000 h*  
Lamp: *Included*  
Insulation class: *Class II*  
LED: *SMD OSRAM 3030*

Harmonics: *<15%*  
Amperage: *0.3 - 0.10 A*  
Power Factor: *0.9*  
Input Frequency: *50/60 Hz*  
Power: *30 W*  
Ambient temperature range: *-20 °C a +45 °C*  
Voltage: *100 - 300 V~*  
Beam angles: *10° / 15° / 30° / 45°*

Real flux:  
2 200 K (1 950 lm) /  
2 700 K (2 100 lm) / 3 000 K  
(2 175 lm) / 4 000 K (2 250 lm)  
/ 5 000 K (2 400 lm)  
Nominal flux:  
CRI: *≥90*  
Light temperature: 2 200 K /  
2 700 K / 3 000 K / 4 000 K  
/ 5 000 K  
UGR: *≤16*

## Optical properties and beam angle

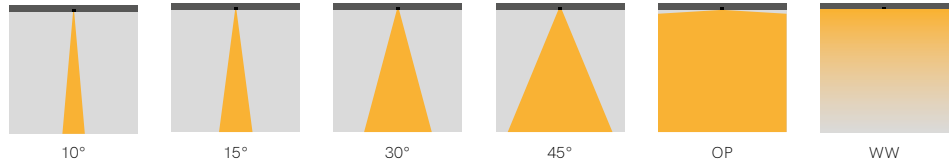

## Product configuration

### TL-2830.TRK

| VARIANT                     | OUTSIDE COLORS        | INSIDE COLORS                                                                                                                                 | LIGHT TEMPERATURE                                                  | BEAM ANGLES                          | OPTICAL LENS                                                         | DIMMABLE   |
|-----------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------|----------------------------------------------------------------------|------------|
| OP OPALINE<br>WW WALLWASHER | B N<br>WHITE<br>BLACK | A YELLOW<br>AC SKY BLUE<br>AR ROYAL BLUE<br>B WHITE<br>C LIGHT BROWN<br>CR CHROME<br>D GOLDEN<br>N BLACK<br>NM BLACK MATT<br>R RED<br>RS PINK | 22 2 200 K<br>27 2 700 K<br>30 3 000 K<br>40 4 000 K<br>50 5 000 K | 10 10°<br>15 15°<br>30 30°<br>45 45° | LC CLEAR<br>LD DIFFUSE<br>LV VERTICAL (LONGITUDINAL)<br>LP PRISMATIC | D DIMTRIAC |

\* Place write only if you want these combinations.

\* Not APPLY WITH OP y WW

## CERTIFICATIONS



\* 10° beam angle only available with clear lens.

