



THE RASTER[®]

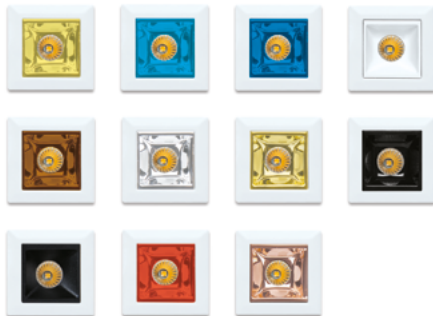

TL-2804.SUS I

CEILING PENDANT

Product description

Linear ceiling pendant luminaire 4 W. With mini reflectors that reduce glare and optimize visual comfort. LED technology with high light efficiency and high CRI.

Additional information

Physical

Outside colors: *White / black*

Inside colors: *Yellow / sky blue / royal blue / white / light brown / chrome / golden / black / matt black / red / pink*

Embedded cut: *Not applies*

Manufactured: *Die-cast aluminum*

Dimension: *2.55×1.37×2.83"*

Mounting: *Pendant*

IP: *23*

IK:

Weight:

Technical data

Dimming:

TRIAC (90 - 130 V~)

Driver: *Included (remote)*

Life Time LED: *35 000 h*

Lamp: *Included*

Insulation class: *Class II*

LED: *SMD OSRAM 3030*

Harmonics: *<15%*

Amperage: *0.04 - 0.01 A*

Power Factor: *0.9*

Input Frequency: *50/60 Hz*

Power: *4 W*

Ambient temperature range:

-20 °C a +45 °C

Voltage: *100 - 300 V~*

Beam angles:

10° / 15° / 30° / 45°

Real flux: *2 200 K (260 lm) /*

2 700 K (280 lm) / 3 000 K

(290 lm) / 4 000 K (300 lm) /

5 000 K (320 lm)

Nominal flux:

CRI: ≥90


Light temperature:

2 200 K / 2 700 K / 3 000 K

/ 4 000 K / 5 000 K

UGR: *≤16*

Optical properties and beam angles

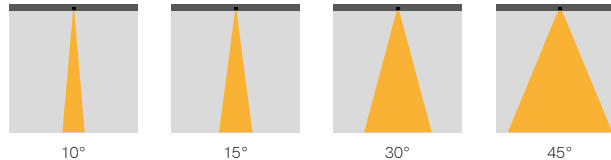

Product configuration

OUTSIDE COLORS		INSIDE COLORS		LIGHT TEMPERATURE		BEAM ANGLES		OPTICAL LENS		DIMMABLE	
B	WHITE	A	YELLOW	22	2 200 K	10	10°	LC	CLEAR	D	DIMTRIAC
N	BLACK	AC	SKY BLUE	27	2 700 K	15	15°	LD	DIFFUSE		
		AR	ROYAL BLUE	30	3 000 K	30	30°	LV	VERTICAL (LONGITUDINAL)		
		B	WHITE	40	4 000 K	45	45°	LP	PRISMATIC		
		C	LIGHT BROWN	50	5 000 K						
		CR	CHROME								
		D	GOLDEN								
		N	BLACK								
		NM	BLACK MATT								
		R	RED								
		RS	PINK								

CERTIFICATIONS



* 10° beam angle only available with clear lens.

