



TL-2810.SUS |

CEILING PENDANT

THE RASTER[®]



* Opaline and wallwasher variables

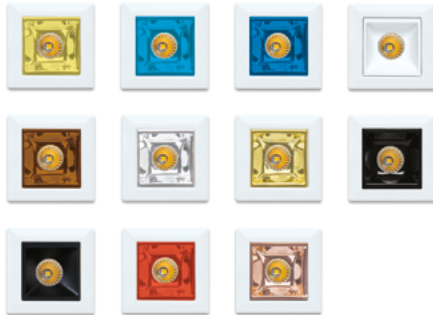

Product description

Ceiling pendant luminaire 10 W. With mini reflectors that reduce glare and optimize visual comfort. LED technology with high light efficiency and high CRI.

Additional information

10° beam angle only available with Clear Lens.

Physical

Outside colors: White / black
Inside colors: Yellow / sky blue / royal blue / white / light brown / chrome / golden / black / matt black / red / pink
Embedded cut: Not applies
Manufactured: Die-cast aluminum

Dimension: 1.37×5.39×2.83"
Mounting: Surface
IP: 23
IK:
Weight:


Technical data

Dimming:
 TRIAC (90 - 130 V~)
Driver: Included (remote)
Life Time LED: 35 000 h
Lamp: Included
Insulation class: Class II
LED: SMD OSRAM 3030

Harmonics: <15%
Amperage: 0.1 - 0.03 A
Power Factor: 0.9
Input Frequency: 50/60 Hz
Power: 10 W
Ambient temperature range: -20 °C a +45 °C
Voltage: 100 - 300 V~
Beam angle: 10° / 15° / 30° / 45°

Real flux: 2 200 K (650 lm) / 2 700 K (700 lm) / 3 000 K (725 lm) / 4 000 K (750 lm) / 5 000 K (800 lm)
Nominal flux: CRI: ≥90
Light temperature: 2 200 K / 2 700 K / 3 000 K / 4 000 K / 5 000 K
UGR: ≤16

Optical properties and beam angle

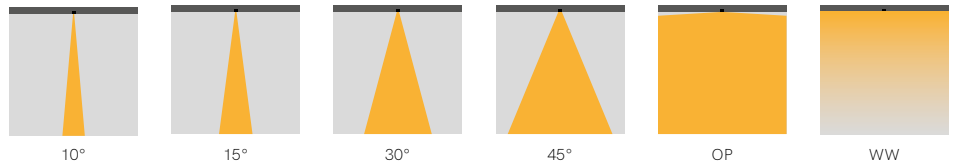

Product configuration

TL-2810.SUS

VARIANT	OUTSIDE COLORS	INSIDE COLORS	LIGHT TEMPERATURE	BEAM ANGLES	OPTICAL LENS	DIMMABLE
OP OPALINE WW WALLWASHER	B N WHITE BLACK	A YELLOW AC SKY BLUE AR ROYAL BLUE B WHITE C LIGHT BROWN CR CHROME D GOLDEN N BLACK NM BLACK MATT R RED RS PINK	22 2 200 K 27 2 700 K 30 3 000 K 40 4 000 K 50 5 000 K	10 10° 15 15° 30 30° 45 45°	LC CLEAR LD DIFFUSE LV VERTICAL (LONGITUDINAL) LP PRISMATIC	D DIMTRIAC

* Place write only if you want these combinations.

* Not APPLY WITH OP y WW

CERTIFICATIONS



* 10° beam angle only available with clear lens.

