

TL-2820.SUS |

CEILING PENDANT

Product description

Ceiling pendant luminaire 20 W. With mini reflectors that reduce glare and optimize visual comfort. LED technology with high light efficiency and high CRI.

Additional information

10° beam angle only available with Clear Lens.

Physical

Outside colors: *White / black*
Inside colors: *Yellow / sky blue / royal blue / white / light brown / chrome / golden / black / matt black / red / pink*
Embedded cut: *Not applies*
Manufactured: *Aluminum casting*

Dimension: *10.61×1.37×2.83"*
Mounting: *Pendant*
IP: *23*
IK:
Weight:


Technical data

Dimming: *TRIAC (90 - 130 V~)*
Driver: *Included (remote)*
Life Time LED: *35 000 h*
Lamp: *Included*
Insulation class: *Class II*
LED: *SMD OSRAM 3030*

Harmonics: *<15%*
Amperage: *0.2 - 0.07 A*
Power Factor: *0.9*
Input Frequency: *50/60 Hz*
Power: *20 W*
Ambient temperature range: *-20 °C a +45 °C*
Voltage: *100 - 300 V~*
Beam angles: *10° / 15° / 30° / 45°*

Real flux:
2 200 K (1 300 lm) / 2 700 K (1 400 lm) / 3 000 K (1 450 lm) / 4 000 K (1 500 lm) / 5 000 K (1 600 lm)
Nominal flux:
CRI: *≥90*
Light temperature: *2 200 K / 2 700 K / 3 000 K / 4 000 K / 5 000 K*
UGR: *≤16*

Optical properties and beam angle

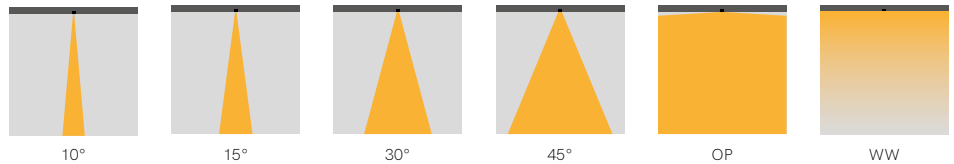

Product configuration

TL-2820.SUS

VARIANT	OUTSIDE COLORS	INSIDE COLORS	LIGHT TEMPERATURE	BEAM ANGLES	OPTICAL LENS	DIMMABLE
OP OPALINE WW WALLWASHER	B WHITE N BLACK	A YELLOW AC SKY BLUE AR ROYAL BLUE B WHITE C LIGHT BROWN CR CHROME D GOLDEN N BLACK NM BLACK MATT R RED RS PINK	22 2 200 K 27 2 700 K 30 3 000 K 40 4 000 K 50 5 000 K	10 10° 15 15° 30 30° 45 45°	LC CLEAR LD DIFFUSE LV VERTICAL (LONGITUDINAL) LP PRISMATIC	D DIMTRIAC

* Place write only if you want these combinations.

* Not APPLY WITH OP y WW

CERTIFICATIONS



* 10° beam angle only available with clear lens.

