



PLEASE READ CAREFULLY BEFORE USING THE PRODUCT
SAVE THESE INSTRUCTIONS

INSTALLATION MANUAL

RASTER PENDANT INSIDE / CEILING PENDANT

MODELS.


TL-2820.SUSB / TL-2820.SUSN APPLY IN ANY INSIDE COLOR, 2 200 K, 2 700 K, 3 000 K, 4 000 K, 5 000 K OR RGBW
LIGHT TEMPERATURE, 10°, 15°, 30° OR 45° BEAM ANGLE, CLEAR, DIFFUSED, VERTICAL OR PRISMATIC OPTICAL
LEN AND DIMMABLE OR NOT DIMMABLE

CAUTION.

- Read all instructions.
- Do not install this track in damp or wet locations.
- Do not install any part of a track system less than 5 feet above the floor.
- Do not install any luminaire assembly closer than 6 inches from any curtain, or similar combustible material.
- Disconnect electrical power before handling or changing track lighting.

INSTALLATION INSTRUCTIONS.

- Verify that the available voltage is adequate for the lighting operation.
- Disconnect electrical power to circuit before installation.
- Mark the holes using the drawing as a reference and drill the corresponding holes.
- Place anchors in the holes.
- Connect the wiring using the driver included with the lighting: Primary (127 V ~) Connect the cables corresponding to positive ("L") and neutral ("N").
- Connect each of the steel wires to the canopy and to the coupling. Attach the suspension system with the canopy and the coupling to the ceiling using 2 "screws.
- Adjust the steel wire to the desired length and cut off the surplus.
- Restore the electrical current and check the correct operation of the lighting.

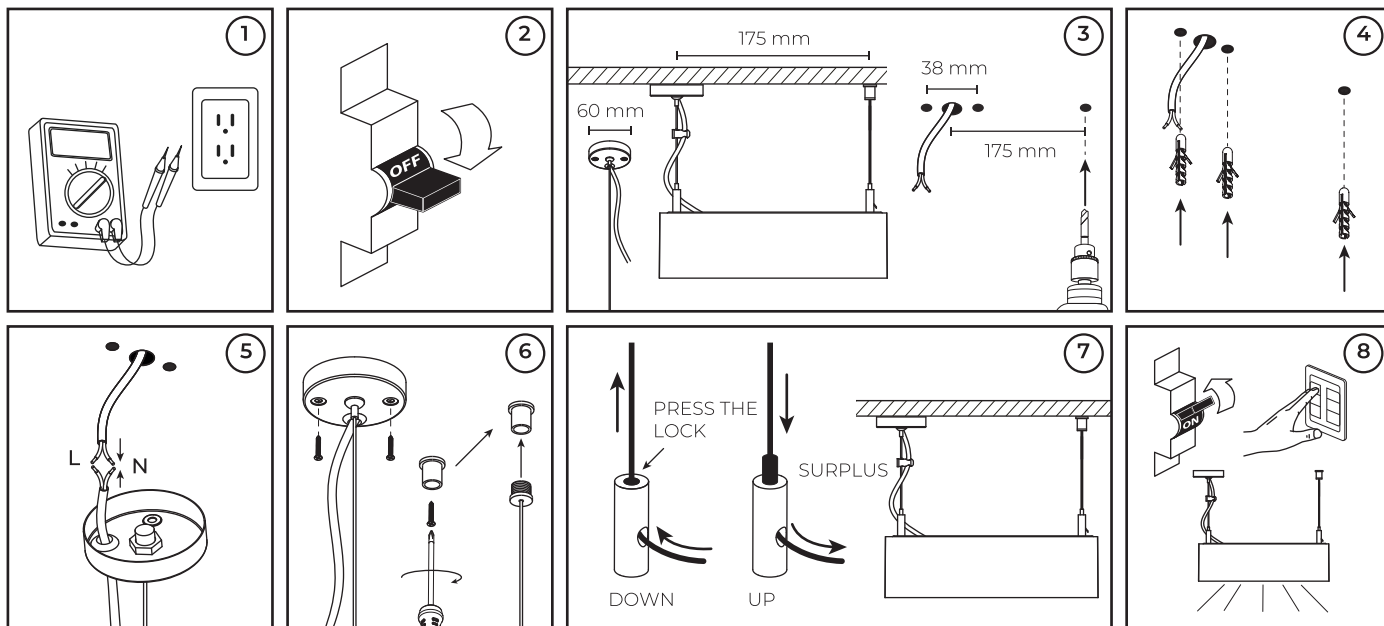

ELECTRIC SPECIFICATIONS.

LAMP: SMD LED 3030 OSRAM

POWER: 20 W

FREQUENCY: 50/60 Hz

VOLTAGE NOT DIMMABLE: 100 - 277 V~ / 0.20 - 0.07 A

VOLTAGE DIMMABLE TRIAC: 90 - 130 V~ / 0.22 - 0.15 A

VOLTAGE RGBW: 100 - 240 V~ / 0.20 - 0.08 A

ENERGY CONSUMPTION: 0.02 kWh

HOURS LIFE: 35 000 h

CRI: ≥90

INTEGRATED DRIVER

OPERATING TEMPERATURE -20 °C TO +45 °C

ILLUX DE MÉXICO S.A. DE C.V.
MADE IN MEXICO

SAVE THESE INSTRUCTIONS



Intertek
5019329

Conforms to
UL Std 1598
UL Std 8750

DATE CODE:

