

TL-2830.SUS |

CEILING PENDANT

Product description

Ceiling pendant luminaire 30 W. With mini reflectors that reduce glare and optimize visual comfort. LED technology with high light efficiency and high CRI.

Additional information

10° beam angle only available with Clear Lens.

Physical

Outside colors: *White / black*
 Inside colors: *Yellow / sky blue / royal blue / white / light brown / chrome / golden / black / matt black / red / pink*
 Embedded cut: *Not applies*
 Manufactured: *Die-cast aluminum*

Dimension: 16.00×1.37×2.83"

Mounting: *Surface*

IP: 23

IK:

Weight:

Technical data

Dimming:

TRIAC (90 - 130 V~)

Driver: *Included (remote)*

Life Time LED: 35 000 h

Lamp: *Included*

Insulation class: *Class II*

LED: *SMD OSRAM 3030*

Harmonics: <15%

Amperage: 0.3 - 0.10 A

Power Factor: 0.9

Input Frequency: 50/60 Hz

Power: 30 W

Ambient temperature range:

-20 °C a +45 °C

Voltage: 100 - 300 V~

Beam angles:

10° / 15° / 30° / 45°

Real flux:

2 200 K (1 950 lm) /

2 700 K (2 100 lm) / 3 000 K

(2 175 lm) / 4 000 K (2 250 lm)

/ 5 000 K (2 400 lm)

Nominal flux:

CRI: ≥90



Light temperature: 2 200 K /

2 700 K / 3 000 K / 4 000 K

/ 5 000 K

UGR: ≤16

Optical properties and beam angle

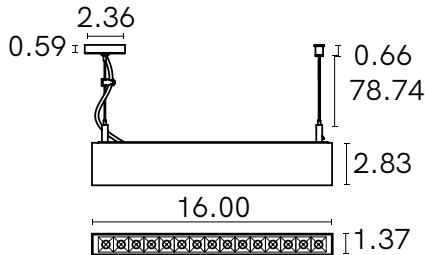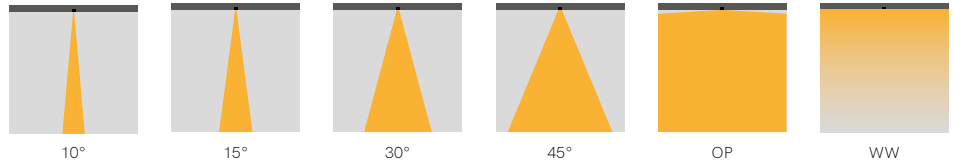

Product configuration

VARIANT		OUTSIDE COLORS		INSIDE COLORS		LIGHT TEMPERATURE		BEAM ANGLES		OPTICAL LENS		DIMMABLE	
TL-2830.SUS													
OP	OPALINE	B	WHITE	A	YELLOW	22	2 200 K	10	10°	LC	CLEAR	D	DIMTRIAC
WW	WALLWASHER	N	BLACK	AC	SKY BLUE	27	2 700 K	15	15°	LD	DIFFUSE		
				AR	ROYAL BLUE	30	3 000 K	30	30°	LV	VERTICAL (LONGITUDINAL)		
				B	WHITE	40	4 000 K	45	45°	LP	PRISMATIC		
				C	LIGHT BROWN	50	5 000 K						
				CR	CHROME								
				D	GOLDEN								
				N	BLACK								
				NM	BLACK MATT								
				R	RED								
				RS	PINK								
											* Not APPLY WITH OP y WW		
FICATIONS													

CERTIFICATIONS



* 10° beam angle only available with clear lens.

