

THE RASTER®

TL-28O4 | RECESSED LUMINAIRE

Product description

Linear recessed luminaire 4 W. With mini reflectors that reduce glare and optimize visual comfort. LED technology with high light efficiency and high CRI.

Additional information

Available with LUTRON Ecosystems (Architectural Dimming).

10° beam angle only available with Clear Lens.

It is necessary four lamps for a driver.

Physical

Outside colors: *White / black*

Inside colors: *Yellow / sky blue / royal blue / white / light brown / chrome / golden / black / matt black / red / pink*

Embedded cut: *2.67×1.45"*

Manufactured: *Die-cast Aluminum*

Dimension: *2.95×1.77×1.92"*

Mounting: *Recessed*

IP: *23*

IK:

Weight:

Technical data

Dimming: *TRIAC (*

90 - 130 V~) / 0-10V

(100 - 277 V~) / DALI

/ LUTRON Ecosystems /

Driver: Included (remote)

Life Time LED: 35 000 h

Lamp: Included

Insulation class: Class II

LED: SMD OSRAM 3030

Harmonics: *<15%*

Amperage: *0.04 - 0.01 A*

Power Factor: *0.9*

Input Frequency: *50/60 Hz*

Power: *4 W*

Ambient temperature range:

-20 °C a +45 °C

Voltage: *100 - 300 V~*

Beam angles:

10° / 15° / 30° / 45°

Real flux: *2 200 K (260 lm) /*

2 700 K (280 lm) / 3 000 K

(290 lm) / 4 000 K (300 lm) /

5 000 K (320 lm)

Nominal flux:

CRI: ≥90



Light temperature: *2 200 K /*

2 700 K / 3 000 K / 4 000 K


/ 5 000 K

UGR: ≤16

Optical properties and beam angles

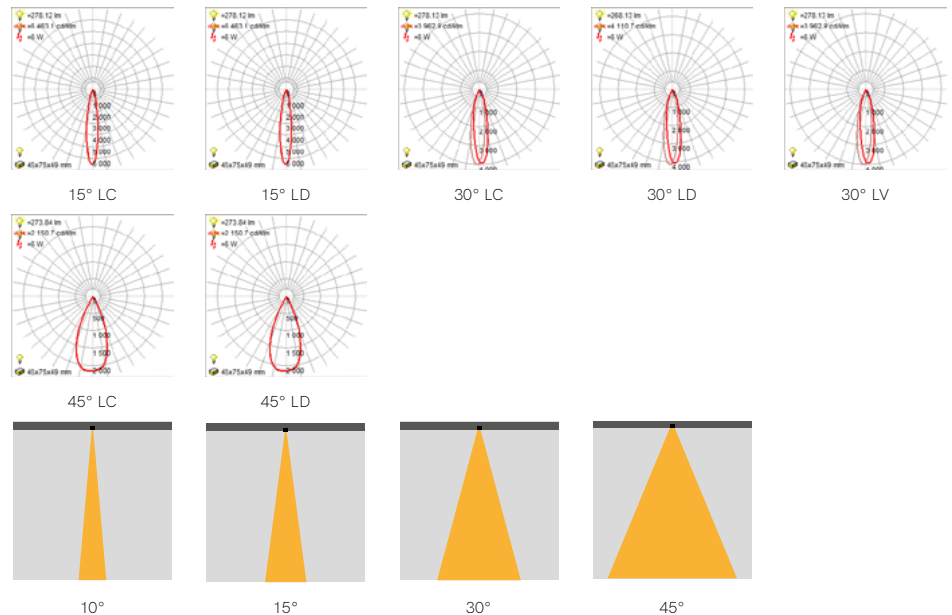

CERTIFICATIONS



Product configuration

OUTSIDE COLORS		INSIDE COLORS		LIGHT TEMPERATURE		BEAM ANGLES		OPTICAL LENS		DIMMABLE	
TL-2804.											
B	WHITE	A	YELLOW	22	2 200 K	10	10°	LC	CLEAR	D	DIMTRIAC
N	BLACK	AC	SKY BLUE	27	2 700 K	15	15°	LD	DIFFUSE	DALI	DALI
		AR	ROYAL BLUE	30	3 000 K	30	30°	LV	VERTICAL (LONGITUDINAL)	0-10V	0-10 V~
		B	WHITE	40	4 000 K	45	45°			PEQ0E	100% - 0.1%
		C	LIGHT BROWN	50	5 000 K			LP	PRISMATIC	LDE5	100% - 5%
		CR	CHROME							LDE1	100% - 1%
		D	GOLDEN							LTEA2W	100% - 1%
		N	BLACK								
		NM	BLACK MATT								
		R	RED								
		RS	PINK								

* 10° beam angle only available with clear lens.

Architectural Dimming LUTRON Ecosystems			
Model	LUTRON Family	Dimming range	Description
PEQ0E	Hi-lume Premier	100% - 0.1%	Hi-lume Premier 0.1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
LDE5	5-Series	100% - 5%	5-Series EcoSystem LED driver
LDE1	Hi-lume	100% - 1%	Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
LTEA2W	Hi-lume	100% - 1%	Hi-lume 1% 2-wire LED driver (120 V forward phase only)

CERTIFICATIONS



--	--	--	--	--	--	--	--	--	--	--